
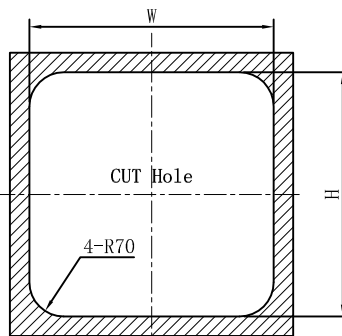


**Fitting Diagram:**

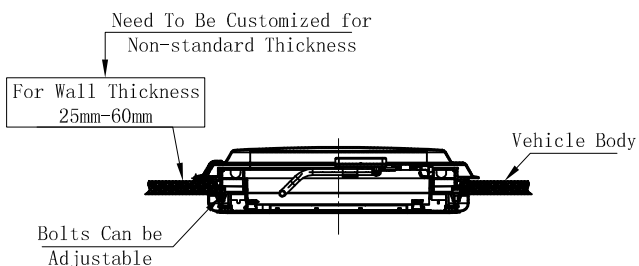

**Specifications:**

Ordering Size (W*H. mm)	Cut Hole Size (W*H. mm)	Overall Size (W*H. mm)	Net Weight (kg)	Cut Hole Corner Radius
500*500	500*500	574*574	6.74	4-R70
700*500	700*500	774*574	9.30	4-R70
800*500	800*500	874*574	10.58	4-R70

W/H:width/height of the door fitting surface,unit:mm

**Description**

Type: roof window

Main Material: High quality aluminum alloy top frame;  
ABS inner frame with LED lights Double glazed  
anti-UV acrylic cover

Color: top frame: black,white,silver gray  
inner frame: white  
glass: transparent gray  
insect net: white  
sunshade: white

Opening angle: 70°

Installation Method: clamping installation

Fitting: 25-35mm, 35-45mm, 45-55mm, 50-60mm(standard)  
Other thickness can be fitted after customized treatment

Features: quick and easy for installation,with LED lights,  
with anti-insect net and sunshade

**Main Functions:**

Open, close, ventilate, insulate, provide privacy, allow sunlight in, prevent insects, and good water seal. Besides, it is with LED lights for lighting function.

**Main Applications:**

Caravan, trailer, modified car, special vehicle etc..

www.belluna.eu		Rev #	Date	Name	Notes
		MILLIMETER			1:15
Break All Non-Specified Edges		INCH			
		QTY			
General Tolerances		Mdl by	Date	Name	RV LED Skylight (MG16SL)
over 0.5 to 6 ±0.05		Drw by			
over 6 to 30 ±0.1		Chk by			
over 30 to 120 ±0.2		App by			
over 120 to 400 ±0.3					
over 400 to 1000 ±0.4					
over 1000 to 2000 ±0.5					